



**HEWLETT
PACKARD**

HEXADECIMAL AND NUMERIC DISPLAYS FOR INDUSTRIAL APPLICATIONS

HIGH EFFICIENCY RED

Low Power HDSP-0760/0761/0762/0763

High Brightness HDSP-0770/0771/0772/0773

YELLOW HDSP-0860/0861/0862/0863

GREEN HDSP-0960/0961/0962/0963

Features

- **THREE COLORS**
High-Efficiency Red
Yellow
High Performance Green
- **THREE CHARACTER OPTIONS**
Numeric
Hexadecimal
Over Range
- **TWO HIGH-EFFICIENCY RED OPTIONS**
Low Power
High Brightness
- **PERFORMANCE GUARANTEED OVER TEMPERATURE**
- **MEMORY LATCH/DECODER/DRIVER**
TTL Compatible
- **4x7 DOT MATRIX CHARACTER**
- **CATEGORIZED FOR LUMINOUS INTENSITY**
- **YELLOW AND GREEN CATEGORIZED FOR COLOR**



Typical Applications

- **INDUSTRIAL EQUIPMENT**
- **COMPUTER PERIPHERALS**
- **INSTRUMENTATION**
- **TELECOMMUNICATION EQUIPMENT**

Description

These solid state display devices are designed and tested for use in adverse industrial environments. The character height is 7.4mm (0.29 inch). The numeric and hexadecimal devices incorporate an on-board IC that contains the data memory, decoder and display driver functions.


The numeric devices decode positive BCD logic into characters "0-9", a "-" sign, decimal point, and a test pattern. The hexadecimal devices decode positive BCD logic into 16 characters, "0-9, A-F". An input is provided on the hexadecimal devices to blank the display (all LED's off) without losing the contents of the memory.

The over range device displays "±1" and right hand decimal point and is typically driven via external switching transistors.

Devices


Part Number HDSP-	Color	Description	Front View
0760 0761 0762 0763	High-Efficiency Red Low Power	Numeric, Right Hand DP Numeric, Left Hand DP Hexadecimal Over Range ±1	A B C D
0770 0771 0772 0763	High-Efficiency Red High Brightness	Numeric, Right Hand DP Numeric, Left Hand DP Hexadecimal Over Range ±1	A B C D
0860 0861 0862 0863	Yellow	Numeric, Right Hand DP Numeric, Left Hand DP Hexadecimal Over Range ±1	A B C D
0960 0961 0962 0963	Green	Numeric, Right Hand DP Numeric, Left Hand DP Hexadecimal Over Range ±1	A B C D

Package Dimensions

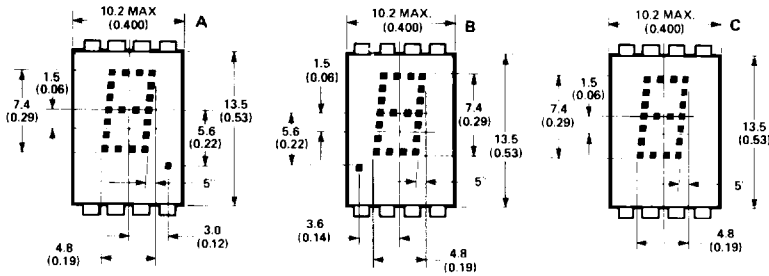


PIN	FUNCTION	
	NUMERIC	HEXA-DECIMAL
1	Input 2	Input 2
2	Input 4	Input 4
3	Input 8	Input 8
4	Decimal point	Blanking control
5	Latch enable	Latch enable
6	Ground	Ground
7	V _{CC}	V _{CC}
8	Input 1	Input 1


REAR VIEW



SIDE VIEW



END VIEW



NOTES:

- Dimensions in millimeters and (inches).
- Digit center line is ± 0.38 mm (± 0.015 inch) from package center line.
- Unless otherwise specified, the tolerance on all dimensions is ± 0.38 mm (± 0.015 inch).
- HDSP-0860 and HDSP-0860 series.

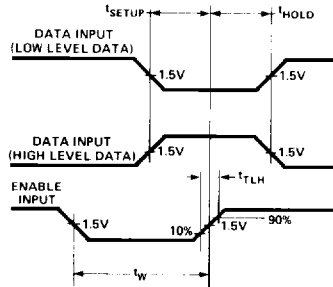


Figure 1. Timing Diagram

BCD DATA ⁽¹⁾				TRUTH TABLE	
X ₈	X ₄	X ₂	X ₁	NUMERIC	HEXA-DECIMAL
L	L	L	L	0	0
L	L	L	H	1	1
L	L	H	L	2	2
L	L	H	H	3	3
L	H	L	L	4	4
L	H	L	H	5	5
L	H	H	L	6	6
L	H	H	H	7	7
H	L	L	L	8	8
H	L	L	H	9	9
H	L	H	L	(BLANK)	(BLANK)
H	L	H	H	(BLANK)	(BLANK)
H	H	L	L	(BLANK)	(BLANK)
H	H	L	H	(BLANK)	(BLANK)
H	H	H	L	(BLANK)	(BLANK)
H	H	H	H	(BLANK)	(BLANK)
DECIMAL PT. ⁽²⁾				ON	V _{DP} = L
				OFF	V _{DP} = H
ENABLE ⁽¹⁾				LOAD DATA	V _E = L
				LATCH DATA	V _E = H
BLANKING ⁽³⁾				DISPLAY ON	V _B = L
				DISPLAY OFF	V _B = H

Notes:

- H = Logic High; L = Logic Low. With the enable input at logic high changes in BCD input logic levels have no effect upon display memory, displayed character, or DP.
- The decimal point input, DP, pertains only to the numeric displays.
- The blanking control input, B, pertains only to the hexadecimal displays. Blanking input has no effect upon display memory.

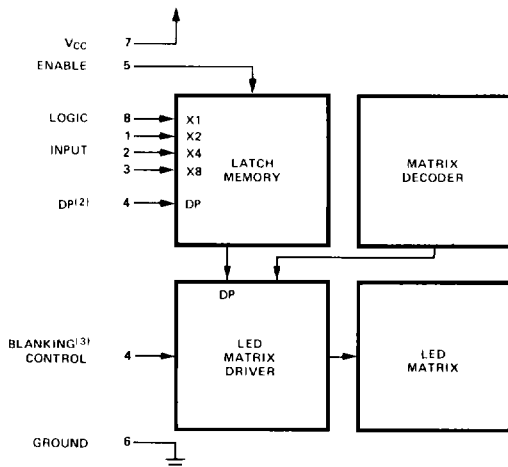


Figure 2. Logic Block Diagram

Absolute Maximum Ratings

Description	Symbol	Min.	Max.	Unit
Storage temperature, ambient	T_S	-65	+100	°C
Operating temperature, ambient ¹⁾	T_A	-55	+85	°C
Supply voltage ²⁾	V_{CC}	-0.5	+7.0	V
Voltage applied to input logic, dp and enable pins	V_I, V_{DP}, V_E	-0.5	V_{CC}	V
Voltage applied to blanking input ²⁾	V_B	-0.5	V_{CC}	V
Maximum solder temperature at 1.59mm (.062 inch) below seating plane; $t \leq 5$ seconds			260	°C

Recommended Operating Conditions

Description	Symbol	Min.	Nom.	Max.	Unit
Supply Voltage ²⁾	V_{CC}	4.5	5.0	5.5	V
Operating temperature, ambient ¹⁾	T_A	-55		+85	°C
Enable Pulse Width	t_w	100			nsec
Time data must be held before positive transition of enable line	t_{STUP}	50			nsec
Time data must be held after positive transition of enable line	t_{HOLD}	50			nsec
Enable pulse rise time	t_{RH}			1.0	msec

Optical Characteristics at $T_A = 25^\circ\text{C}$, $V_{CC} = 5.0\text{V}$

Device	Description	Symbol	Min.	Typ.	Max.	Unit
HDSP-0760 Series	Luminous Intensity per LED (Digit Average) ^{3,4)}	I_V	65	140		μcd
	Peak Wavelength	λ_{PEAK}		635		nm
	Dominant Wavelength ⁵⁾	λ_d		626		nm
HDSP-0770 Series	Luminous Intensity per LED (Digit Average) ^{3,4)}	I_V	260	620		μcd
	Peak Wavelength	λ_{PEAK}		635		nm
	Dominant Wavelength ⁵⁾	λ_d		626		nm
HDSP-0860 Series	Luminous Intensity per LED (Digit Average) ^{3,4)}	I_V	215	490		μcd
	Peak Wavelength	λ_{PEAK}		583		nm
	Dominant Wavelength ^{5,6)}	λ_d		585		nm
HDSP-0960 Series	Luminous Intensity per LED (Digit Average) ^{3,4)}	I_V	298	1100		μcd
	Peak Wavelength	λ_{PEAK}		568		nm
	Dominant Wavelength ^{5,6)}	λ_d		574		nm

Notes:

- The nominal thermal resistance of a display mounted in a socket that is soldered onto a printed circuit board is $R\theta_{JA} = 50^\circ\text{C/W/device}$. The device package thermal resistance is $R\theta_{J-PIN} = 15^\circ\text{C/W/device}$. The thermal resistance device pin-to-ambient through the PC board should not exceed $35^\circ\text{C/W/device}$ for operation at $T_A = +85^\circ\text{C}$.
- Voltage values are with respect to device ground, pin 6.
- These displays are categorized for luminous intensity with the intensity category designated by a letter code located on the back of the display package. Case temperature of the device immediately prior to the light measurement is equal to 25°C .

Electrical Characteristics; $T_A = -55^\circ\text{C}$ to $+85^\circ\text{C}$

Description	Symbol	Test Conditions	Min.	Typ. ^[7]	Max.	Unit	
Supply Current HDSP-0760 Series HDSP-0770 Series HDSP-0860 Series HDSP-0960 Series	I_{CC}	$V_{CC} = 5.5\text{V}$ (characters "5." or "B" displayed)		78	105	mA	
				120	175		
Power Dissipation HDSP-0760 Series HDSP-0770 Series HDSP-0860 Series HDSP-0960 Series	P_T				390	573	mW
					690	963	
Logic, Enable and Blanking Low-Level Input Voltage	V_{IL}	$V_{CC} = 4.5\text{V}$			0.8	V	
Logic, Enable and Blanking High-Level Input Voltage	V_{IH}		2.0			V	
Logic and Enable Low-Level Input Current	I_{IL}	$V_{CC} = 5.5\text{V}$			-1.6	mA	
Blanking Low-Level Input Current	I_{BL}	$V_{IL} = 0.4\text{V}$			-10	μA	
Logic, Enable and Blanking High-Level Input Current	I_{IH}	$V_{CC} = 5.5\text{V}$ $V_{IH} = 2.4\text{V}$			+40	μA	
Weight				1.0		gm	
Leak Rate					5×10^{-8}	cc/sec	

Notes:

4. The luminous intensity at a specific operating ambient temperature, $I_V(T_A)$ may be approximated from the following exponential equation:
 $I_V(T_A) = I_V(25^\circ\text{C}) e^{k(T_A - 25^\circ\text{C})}$

Device	K
HDSP-0760 Series HDSP-0770 Series	-0.0131/ $^\circ\text{C}$
HDSP-0860 Series	-0.0112/ $^\circ\text{C}$
HDSP-0960 Series	-0.0104/ $^\circ\text{C}$

5. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and is that single wavelength which defines the color of the device.
 6. The HDSP-0860 and HDSP-0960 series devices are categorized as to dominant wavelength with the category designated by a number on the back side of the display package.
 7. All typical values at $V_{CC} = 5.0\text{V}$ and $T_A = 25^\circ\text{C}$.

Operational Considerations

ELECTRICAL

These devices use a modified 4 x 7 dot matrix of light emitting diode to display decimal/hexadecimal numeric information. The high efficiency red and yellow LED's are GaAsP epitaxial layer on a GaP transparent substrate. The green LED's are GaP epitaxial layer on a GaP transparent substrate. The LED's are driven by constant current drivers, BCD information is accepted by the display memory when the enable line is at logic low and the data is latched when the enable is at logic high. Using the enable pulse width and data setup and hold times listed in the Recommended Operating Conditions allows data to be clocked into an array of displays at a 6.7 MHz rate.

The decimal point input is active low true and this data is latched into the display memory in the same fashion as the BCD data. The decimal point LED is driven by the on-board IC.

The blanking control input on the hexadecimal displays blanks (turns off) the displayed information without disturbing the contents of display memory. The display is

blanked at a minimum threshold level of 2.0 volts. When blanked, the display standby power is nominally 250 mW at $T_A = 25^\circ\text{C}$.

MECHANICAL

The primary thermal path for power dissipation is through the device leads. Therefore, to insure reliable operation up to an ambient temperature of $+85^\circ\text{C}$, it is important to maintain a cast-to-ambient thermal resistance of less than 35°C watt/device as measured on top of display pin 3.

Post solder cleaning may be accomplished using water, Freon/alcohol mixtures formulated for vapor cleaning processing (up to 2 minutes in vapors at boiling) or Freon/alcohol mixtures formulated for room temperature cleaning. Suggested solvents: Freon TF, Freon TE, Genesolv DI-15, Genesolv DE-15.

CONTRAST ENHANCEMENT

These display devices are designed to provide an optimum ON/OFF contrast when placed behind an


appropriate contrast enhancement filter. The following filters are suggested:

Display Color	Ambient Lighting		
	Dim	Moderate	Bright
HDSP-0860 Series Yellow	Panelgraphic Yellow 27 Chequers Amber 107	Polaroid HNCP 37 3M Light Control Film Panelgraphic Gray 10 Chequers Grey 105	Polaroid Gray HNCP10 HOYA Yellowish-Orange HLF-608-3Y Marks Gray MCP-0301-8-10
HDSP-0760 Series HDSP-0770 Series High Efficiency Red	Panelgraphic Ruby Red 60 Chequers Red 112		Polaroid Gray HNCP10 HOYA Reddish-Orange HLF-608-5R Marks Gray MCP-0301-8-10 Marks Reddish-Orange MCP-0201-2-22
HDSP-0960 Series HP Green	Panelgraphic Green 48 Chequers Green 107		Polaroid Gray HNCP10 HOYA Yellow-Green HLF-608-1G Marks Yellow-Green MCP-0101-5-12

Over Range Display

The over range devices display "±1" and decimal point. The character height and package configuration are the same as the numeric and hexadecimal devices. Character selection is obtained via external switching transistors and current limiting resistors.

Package Dimensions



Pin	Function
1	Plus
2	Numeral One
3	Numeral One
4	DP.
5.	Open
6	Open
7	V _{CC}
8	Minus/Plus

Note:
1: Dimensions in millimetres and inches.

Character	Pin			
	1	2,3	4	8
.	1	X	X	1
—	0	X	X	1
1	X	1	X	λ
Decimal Point	X	X	1	X
Blank	0	0	0	0

Notes:
0: Line switching transistor in Figure 7 cutoff.
1: Line switching transistor in Figure 7 saturated.
X: 'don't care'

Absolute Maximum Ratings

Description	Symbol	Min.	Max.	Unit
Storage Temperature, Ambient	T _S	-65	+100	°C
Operating Temperature, Ambient	T _A	-55	+85	°C
Forward Current, Each LED	I _F		10	mA
Reverse Voltage, Each LED	V _R		5	V

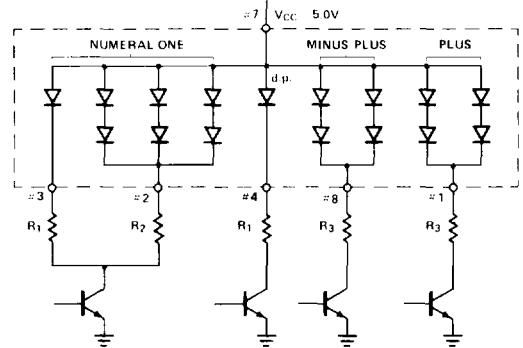


Figure 3. Typical Driving Circuit

Recommended Operating Conditions $V_{CC} = 5.0V$

Device	Forward Current Per LED, mA	Resistor Value			
		R ₁	R ₂	R ₃	
HDSP-0763	Low Power	2.8	1300	200	300
	High Brightness	8	360	47	68
HDSP-0863	8	360	36	56	
HDSP-0963	8	360	30	43	

Luminous Intensity Per LED

Digit Average [3,4] at $T_A = 25^\circ C$

Device	Test Conditions	Min.	Typ.	Units
HDSP-0763	$I_F = 2.8 \text{ mA}$	65	140	μcd
	$I_F = 8 \text{ mA}$		620	μcd
HDSP-0863	$I_F = 8 \text{ mA}$	215	490	μcd
HDSP-0963	$I_F = 8 \text{ mA}$	298	1100	μcd

Electrical Characteristics; $T_A = -55^\circ C$ to $+85^\circ C$

Device	Description	Symbol	Test Condition	Min.	Typ.	Max.	Units
HDSP-0763	Power Dissipation all LED's Illuminated:	P_T	$I_F = 2.8 \text{ mA}$		72		mW
			$I_F = 8 \text{ mA}$		224	282	
	Forward Voltage per LED	V_F	$I_F = 2.8 \text{ mA}$		1.6		V
			$I_F = 8 \text{ mA}$		1.75	2.2	
HDSP-0863	Power Dissipation all LED's Illuminated:	P_T	$I_F = 8 \text{ mA}$		237	282	mW
	Forward Voltage per LED	V_F			1.90	2.2	V
HDSP-0963	Power Dissipation all LED's Illuminated:	P_T	$I_F = 8 \text{ mA}$		243	282	mW
	Forward Voltage per LED	V_F			1.85	2.2	V